

# ***HDFocus* Specification**

## Floorstanding Kiosk

49" Floorstanding Kiosk with Capacitive Touch

HD-49F-T Windows

1. Product Outlook



Front



Side

2. Main Features

- ◆Excellent design with aluminum edging;
- ◆Brand new original panel with LED backlight;
- ◆Ultra high resolution of 1920\*1080, can customize 3840\*2160;
- ◆Excellent design with super slim body of only 24.4mm thickness;
- ◆Build in 10 point capacitive touch;
- ◆Windows OS, support to customize Android OS;
- ◆Built in professional digital signage software, user-friendly program editing;
- ◆With live and cloud-based hosting, can realize central control or publish content to kiosks at any time and anywhere;
- ◆Color available: black, silver grey, champagne golden;
- ◆Support Ethernet, WIFI network, and can customize 3/4G function;
- ◆HD-DS software support cloud management through Internet;
- ◆Industrial level design, support 24/7 working;
- ◆CE, RoHS, TELEC and PSE certified;
- ◆ISO9001 and ISO14000 certified;

3. Display

|                |                                  |
|----------------|----------------------------------|
| Display Screen | 49" TFT Panel with LED backlight |
| Display Ratio  | 16:9                             |
| Color          | 16.77M colors                    |
| Display area   | 1073.8*604mm                     |
| Resolution     | 1920*1080                        |
| Brightness     | 350cd/m2                         |
| Response Time  | Less than 5ms                    |
| Contrast       | 3000:1                           |
| View Angle     | 178° left and right, up and down |
| Life time      | Over 60,000hrs                   |

4. Capacitive Touch

|                   |                         |
|-------------------|-------------------------|
| Touch Type        | Capacitive touch, G+G   |
| Points            | 10 points               |
| Glass cover       | Tempered glass cover    |
| Response Time     | Less than 5ms           |
| Resolution        | 32767 * 32767           |
| Position Accuracy | ±1.5mm                  |
| Communication     | USB2.0                  |
| Life Time         | Over 80,000,000 touches |

5. Windows Motherboard Performance

Client can choose from the Pro, Max or Maxplus version for the Windows motherboard, we also can customize other configurations, pls check with sales separately.

|                       |                                                                                                |
|-----------------------|------------------------------------------------------------------------------------------------|
| Configuration options | Pro version: Intel I3 CPU, 4 <sup>th</sup> Generation, DDR 3 4G RAM, 128G SSD(can expand).     |
|                       | Max version: Intel I5 CPU, 4 <sup>th</sup> Generation, DDR 3 4G RAM, 128G SSD(can expand).     |
|                       | Maxplus version: Intel I7 CPU, 4 <sup>th</sup> Generation, DDR 3 4G RAM, 128G SSD(can expand). |
| Graphics card         | Intel® HD Graphics card integrated                                                             |
| WIFI                  | Support WIFI dual band 2.4G/5.2G                                                               |
| Windows OS            | Windows7, 8.1, 10,11 trial version;<br>Linux OS                                                |


6. Windows Motherboard I/O Interface

|                   |                                          |
|-------------------|------------------------------------------|
| USB               | USB 2.0*2,USB3.0*2                       |
| HDMI Output       | HDMI*2                                   |
| VGA Output        | VGA*1                                    |
| MIC Audio Input   | MIC Audio*1                              |
| Line Audio Output | Line*1                                   |
| Network           | RJ45*1/RJ45*2, built-in Gigabit Ethernet |
| WIFI              | WIFI*1, support 802.11 b/g/n             |
| Power             | DC IN 12V(2.5mm)                         |


7. Others

|                     |                            |
|---------------------|----------------------------|
| Format              | PAL, NTSC                  |
| Speaker             | 10W*2                      |
| Floorstand Basement | Basement*1                 |
| Wheels              | Lockable wheels (optional) |
| Voltage             | DC12V/AC100-240V 50/60Hz   |
| Power               | ≤ 90W                      |
| Net Dimension       | 1,866.5 *690.3*24.4mm      |
| Net Weight          | 40KG                       |
| Gross Weight        | 45KG                       |


8. Dimension Drawing

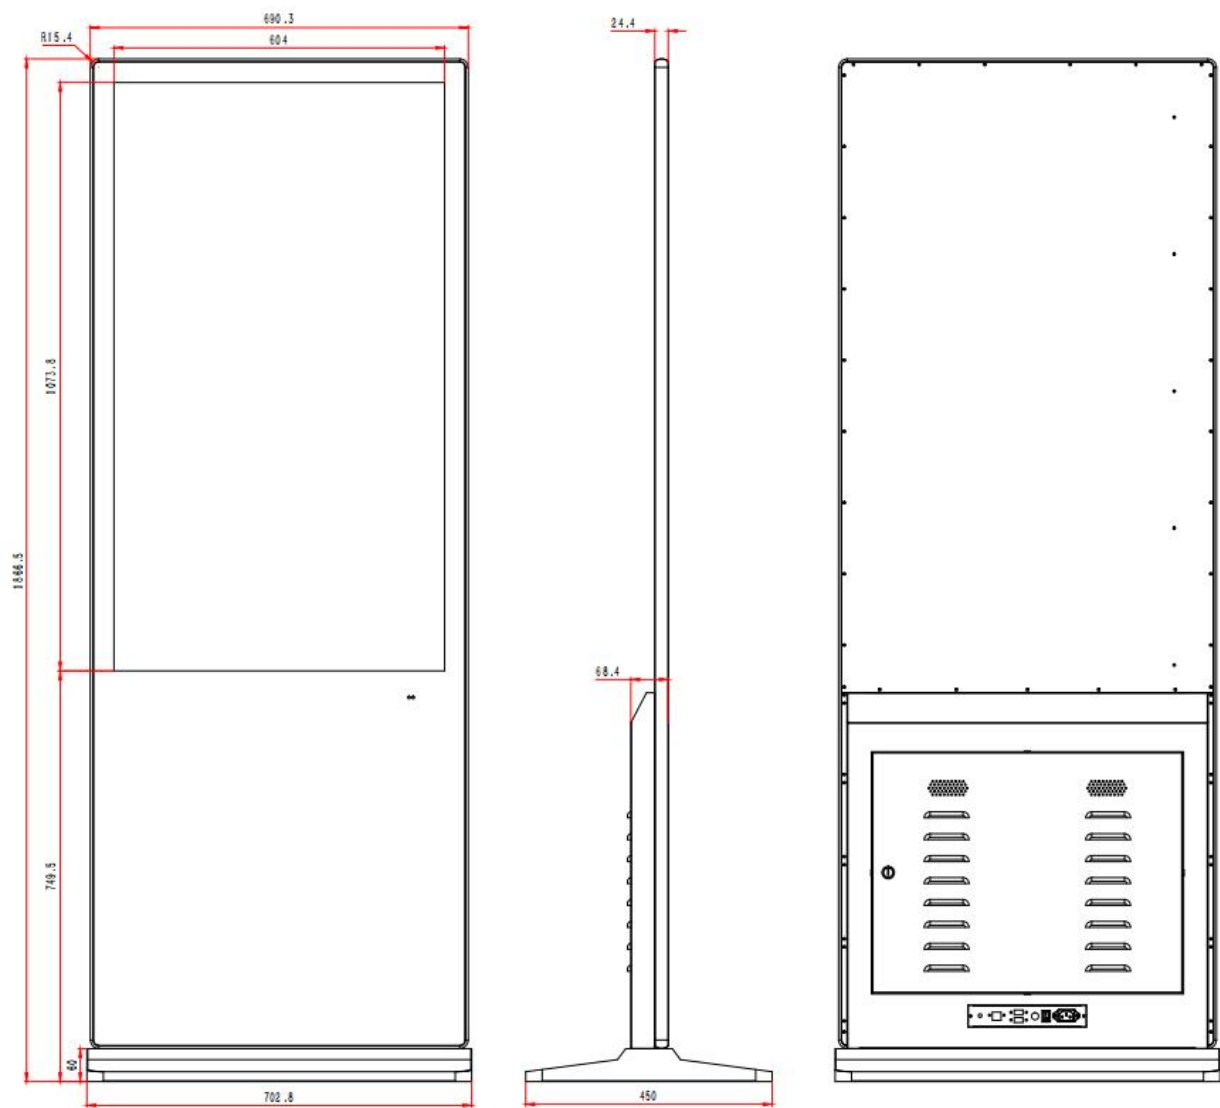

## 9. HD-DS Digital Signage Software

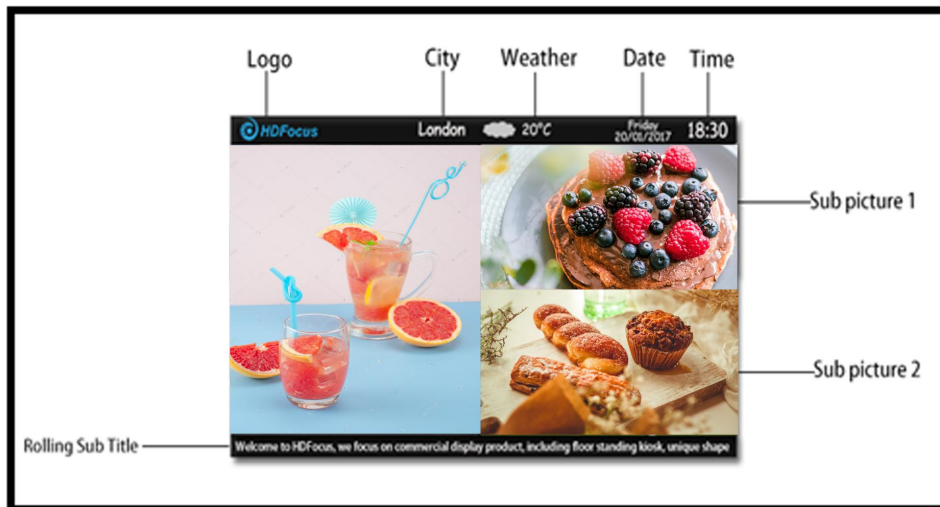


### Program Interface Edited by HD-DS Software

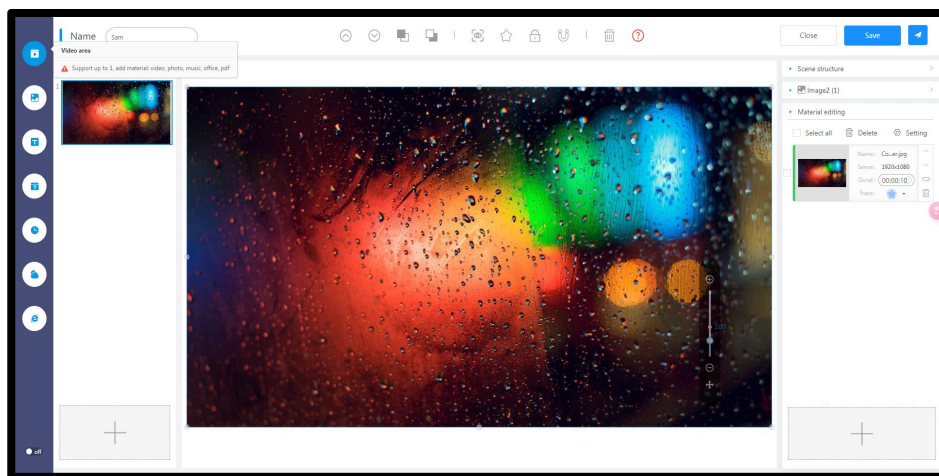

Cloud Management Platform

### HD-DS Key Features:

- ※ Cloud based hosting: with live and cloud-based hosting, can realize central control or publish content to kiosks at any time and anywhere.
- ※ Support visually make program, can preview the program immediately;
- ※ Support centrally manage the system, but every terminal will download the program and play locally;
- ※ Remotely control, such as restart, volume adjust, brightness adjust, system upgrade;
- ※ Support schedule program playing;
- ※ Support switch equipment on and off regularly;
- ※ Support kiosk group management;
- ※ Supports splicing of multiple devices with the same resolution.

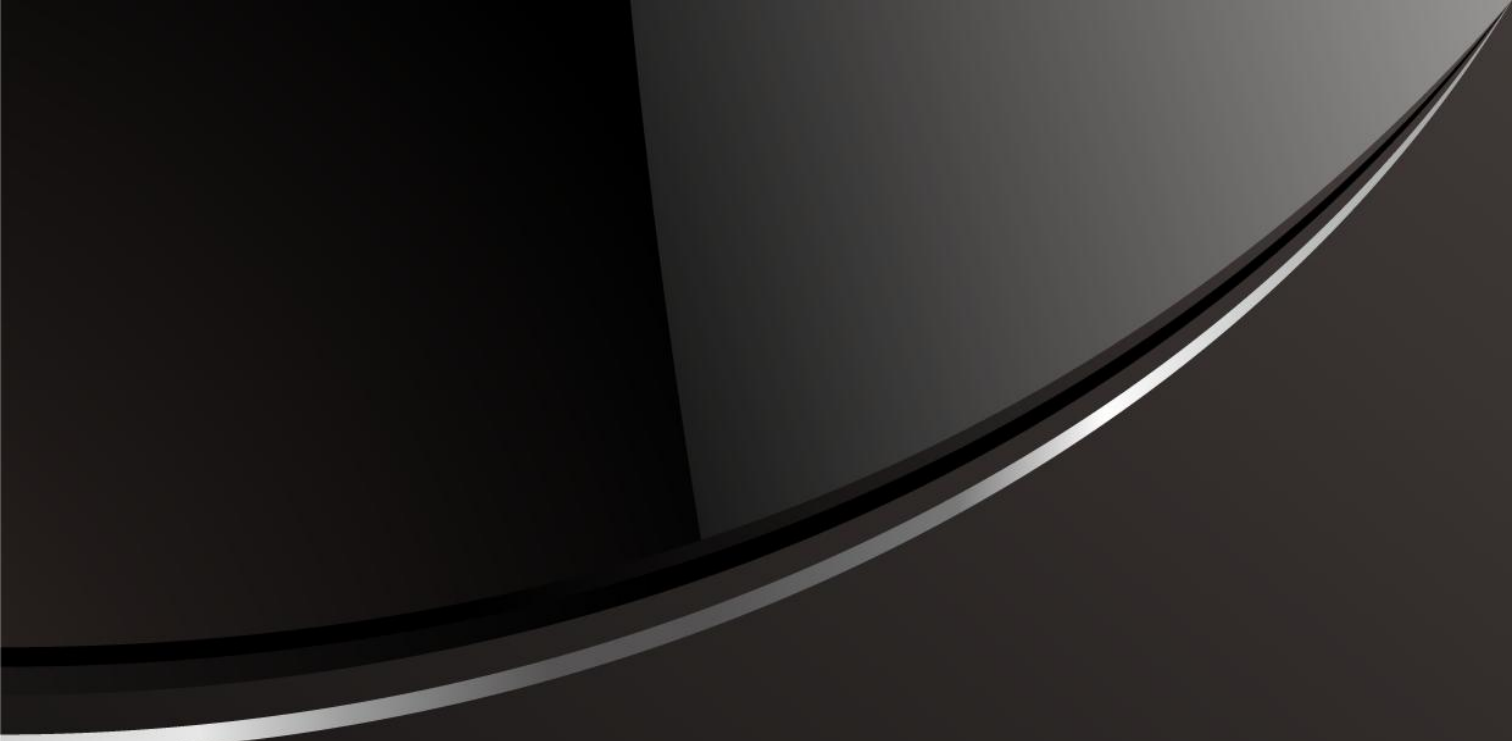

Shenzhen HDFocus Technology Co., Ltd

Add: 5th Floor, 51 Building, Bantian No. 3 Industrial Park, Bantian Community, Bantian Street,  
Longgang, Shenzhen, China 518129  
T: 0086 755 8520 4829

Web: [www.hdfocuspro.com](http://www.hdfocuspro.com)